

## CAN bus repeater for J1939 HD67182



Abbildung ähnlich

- for professional use
- Enables extension of a line segment
- galvanic isolation of the CAN branches
- Extension of the number of nodes
- Protocol-independent

<https://www.wachendorff-prozesstechnik.de/en/HD67182>

### Description

The HD67182 repeater solves your line extension problems and is ideal for galvanic isolation. It is suitable for use in motors and devices with electromagnetic interference. Suitable as a repeater in the following bus protocols: J1939 and complies with the generic standard ISO 11898. 16-bit microprocessor is used for internal data processing. Two-sided programming of the transmission rate is generally possible, whereby the maximum transmission rate is 1 Mbps (at 25 meters). Several devices can be inserted in the same network. DIN rail mounting and plug-in screw terminals ensure quick and safe installation and easy wiring of the device.

### Accessories Order no.


DRS4-24A	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
AC34107	Null modem cable, socket/socket, 3 m long

### Product details

Interfaces:	2x CAN (removable screw terminal, 3-pin)
Max. Distance:	5,000m for 10k bps; 25m for 1Mbps
Possible baud rates:	10 Kbps, 20 Kbps, 50Kbps, 62.5 Kbps, 100 Kbps, 125 Kbps, 250 Kbps, 500 Kbps, 800 Kbps, 1,000 Kbps
Galv. separation:	1 KV
Standard:	ISO 11898
DIP switch:	8 pieces for setting the different baud rates.
LED:	3x signal display for supply and communication.
Supply:	10 VDC to 35 VDC, 4Watt 10 VAC to 19 VAC, 4 VA, 50/60 Hz
Operating temperature:	-40°C to +85°C
Humidity:	10% to 80% , non-condensing
CE conformity:	EN61000-6-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11, ENV50204
EMC Directive:	EMC2004/108/CE
Dimensions (W x H x D):	23 mm x 107 mm x 120 mmm
Weight:	approx. 200g
Housing:	PVC
Fastening:	Mounting on the DIN rail.
Customs tariff number:	8517 62 00
Manufacturer:	ADFweb.com S.r.l.

### Products Order no.

Drawings  
Dimension

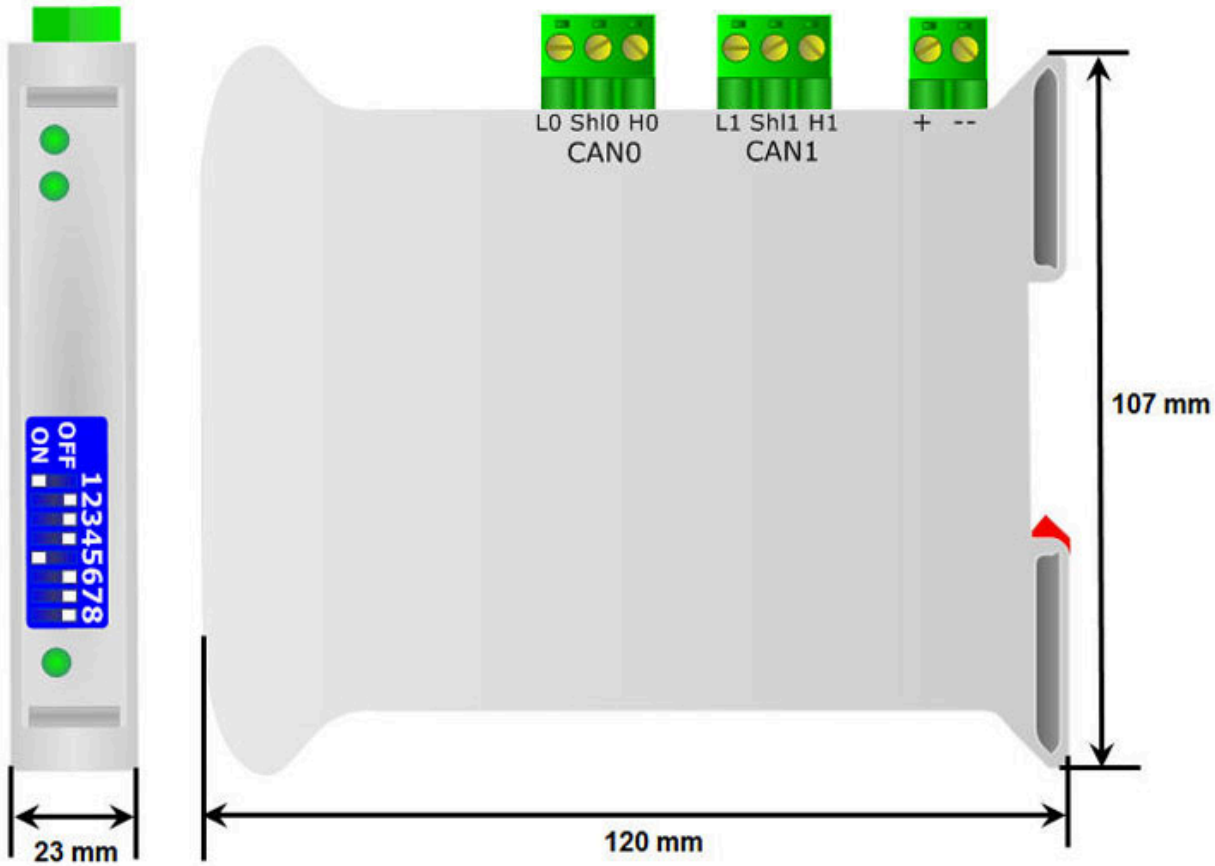

Drawings


Step file



The step file .pdf is for viewing. You can find the step file for download in the Downloads / FAQ tab  
HD67181.pdf

Drawings

Connection diagram

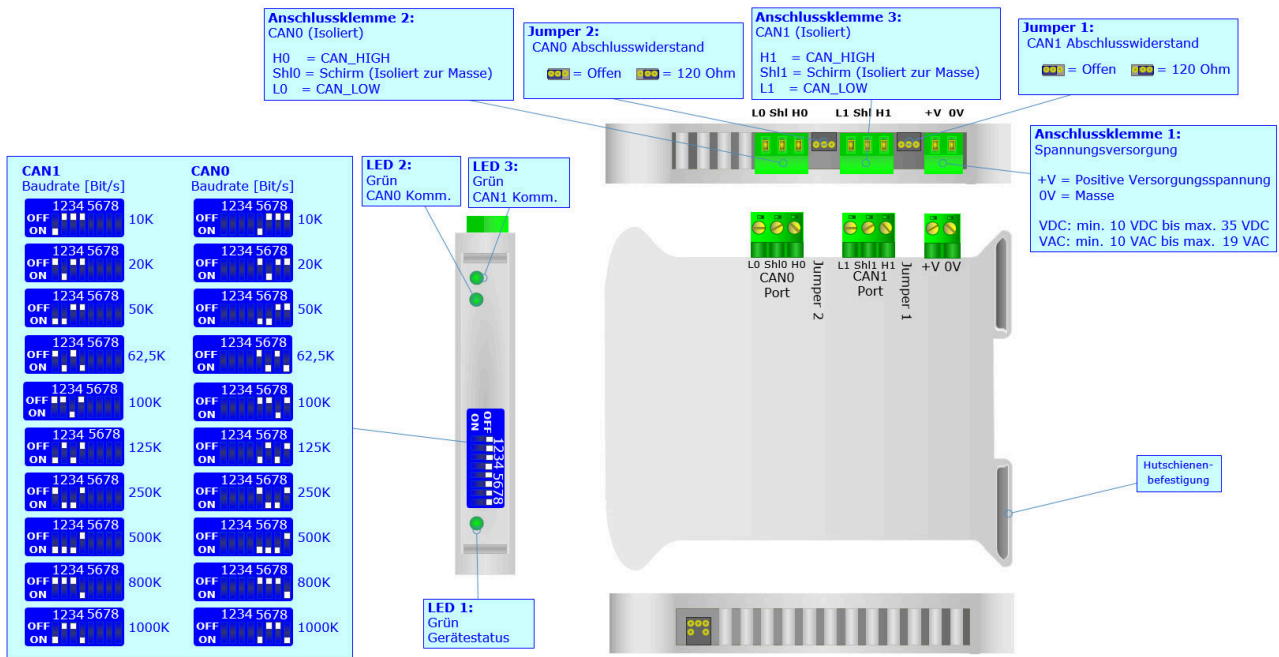

HD67181.pdf



Wachendorff Prozesstechnik GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 (0) 67 22 / 99 65 - 20  
E-Mail: [wp@wachendorff.de](mailto:wp@wachendorff.de)  
[www.wachendorff-prozesstechnik.de](http://www.wachendorff-prozesstechnik.de)

