

IloT Gateway, WBGcMTG01



- Remote access to PLCs via EasyAccess 2.0
- OPC UA (client/server)
- MQTT
- Modbus TCP/IP gateway
- MPI 187.5 K
- Compact design and DIN rail mounting
- Fanless cooling system
- Integrated 256 MB flash memory
- Galvanic isolation of the input voltage from the system voltage

<https://www.wachendorff-prozesstechnik.de/en/WBGcMTG01>

Description

Data integrity plays a major role in an IloT application. To achieve this data integrity, it is essential that the communication of machines and systems with the higher-level monitoring and control systems (SCADA, ERP... etc.) functions seamlessly. In a factory where each control system uses its own driver for communication, ensuring data integrity is extremely difficult.

With the new IloT smart communication gateway WBGcMTG01 from Weintek, we provide you with the best solution for data transfer and integration in the IloT.

The OPC UA and MQTT protocols make the WBGcMTG01 an IloT gateway for your smart factory. With more than 300 drivers for the most well-known PLC and controller manufacturers, the WBGcMTG01 can be used as a Modbus TCP/IP gateway to higher-level control systems (SCADA).

The very compact, fanless WBGcMTG01 with a wide temperature range fits into any control cabinet and communicates with existing infrastructure. The 32-bit Cortex A8 processor with a clock rate of 600 MHz ensures very fast data processing, while the integrated battery-backed real-time clock enables secure data storage with a reliable time stamp.


Specifications:	PCB circuit board coating: Coated circuit board is protected against corrosion and ensures high reliability. Housing: Plastic Dimensions (LxHxW): 109 mm x 81 mm x 27 mm Weight: approx. 140 g Mounting: 35 mm DIN rail
Certificates:	CE, cULus
Software:	EasyBuilder Pro V5.06.01 or later versions
Manufacturer:	Weintek Labs, Inc

Product details

Memory:	Flash: 256 MB RAM: 256 MB
Processor:	32 bit RISC Cortex-A8, 600 MHz
Interfaces:	Ethernet (LAN1): 10/100/1000 Base-Tx 1 Ethernet (LAN2): 10/100 Base-Tx 1 COM port: COM1: RS232 2-wire COM2: RS485 2-/4-wire COM3: RS485 2-wire
Real-time clock (RTC):	integrated
Supply voltage:	Input voltage: 24 VDC $\pm$ 20 % Voltage isolation: integrated Current consumption: 230 mA at 24 VDC Dielectric strength: 500 VAC (1 min) Insulation resistance: 50MOhm at 500 VDC Vibration resistance: 10 to 25 Hz (X, Y, Z direction, 2G for 30 min.)
Ambient conditions:	Protection class: IP20 Storage temperature: -20°C to 60°C (-4°F to 140°F) Operating temperature: 0°C to 50°C (32°F to 122°F) Relative humidity: 10% to 90% (non-condensing)

Drawings

Dimensions

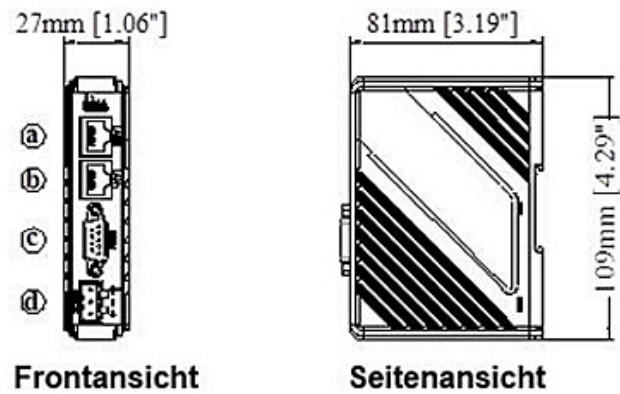

- a. Ethernet Port 2 (10M/100M)
- b. Ethernet Port 1 (10M/100M/1G)
COM1: RS-232 2-Draht
- c. COM2: RS-485 2-/4-Draht
COM3: RS-485 2-Draht
- d. Anschluss Spannungsversorgung
- e. Reset Taster



Male, 9 Pin, D-sub

PIN#	COM1 [RS232]	COM2 [RS485]		COM3 [RS485]
		2W	4W	
1				Data+
2	RxD			
3	TxD			
4				Data-
5		GND		
6		Data+	Rx+	
7		Data-	Rx-	
8			Tx+	
9			Tx-	

Drawings

Step file



Step file as .rar

cMTG01.rar



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

