

J1939 communication module CRM000CMJ1939000



- J1939 protocol conversion
 - Easy integration of selected Red Lion devices into J1939 protocol networks
 - Converts between J1939 and more than 300 different protocols.
- All-in-one solution
 - No external devices and communication gateways required
 - Cost-effective, space and time saving
- -10 °C to +50 °C operating temperature
 - Works reliably in harsh environments
- Powered by the host device
 - Simplifies deployment by eliminating external power external power supply.
- Easy to program
 - Seamless configuration with Red Lion Desktop Crimson software.

<https://www.wachendorff-prozesstechnik.de/en/CRM000CMJ1939000>

Description


Red Lion's J1939 module provides easy integration into J1939 protocol networks and enables the translation of more than 300 different protocols. Configure the J1939 module with Red Lion's Crimson® software, which simplifies setup via an intuitive graphical user interface with drag-and-drop functionality.

Product details

Power supply:	J1939 Max. Power: 1.2 W (provided by the host device)
Communication features:	J1939 protocol port: Software programmable up to 250 Kbaud and digitally isolated 124 Ohm, 1 W Termination provided by switch The port can be configured for different J1939 protocols. Isolation from host: 1000 VDC for 1 minute
Ambient conditions:	Operating temperature range: -10 °C to +50 °C Storage temperature range: -40 °C to +85 °C Relative humidity: 85 % max. relative humidity, non-condensing from 0 °C to +50 °C Altitude: Up to 2000 meters
Compatible HOST devices:	CR3000 Series DA30D High Performance Data Station
Certifications and conformities:	CE-approved EN 61326-1 for industrial sites IEC/EN 61010-1 RoHS compliant
Dimensions (W x H x D):	32 mm x 116.8 mm x 90.8 mm

Drawings

Dimensions

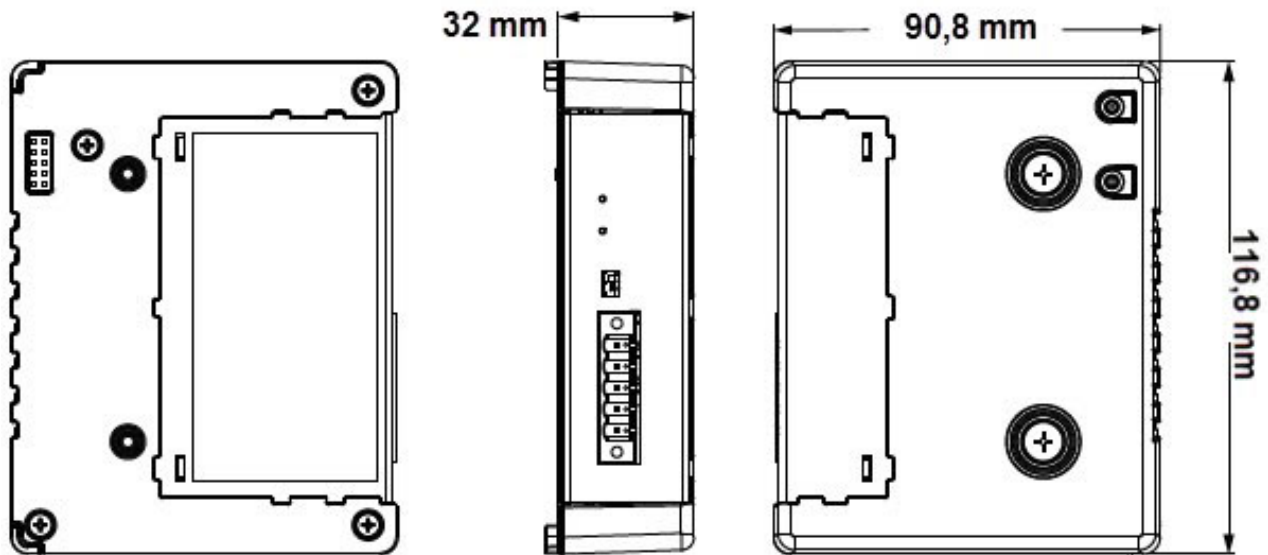



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

