


Powerful 7-inch WebPanel with AutomationBrowser



- 7" brilliant TFT-LCD graphic display, 1024 x 600 pixels
- Fast image generation with powerful processor
- Robust aluminum housing, low installation depth
- High protection class IP65, flush-mounted design
- Always connected: Integrated WiFi and Bluetooth
- AutomationBrowser pre-installed

<https://www.wachendorff-prozesstechnik.de/en/JWS070-A200-3288432KY-A>

Description

This WebPanel series is based on a powerful RK3288 quad-core Cortex-A17 processor.

The WebPanels are available in display sizes from 7" to 23.8", either with projected capacitive or without touch.

The front of the housing is IP65-rated and the aluminum housing makes for a very compact and robust design. The WebPanel can be used almost anywhere thanks to its low installation depth.

The WebPanel has a pre-installed *AutomationBrowser* and is designed for connection to controllers with their own web server (e.g. CODESYS V3 web server). Setting up and operating the web browser is extremely simple and intuitive. The integrated WiFi and Bluetooth interfaces enable a wide range of applications.


Product details

Power supply:	12 VDC to 36 VDC
Power consumption:	Power consumption: max. 21.6 W
Display:	7" TFT LCD
Resolution:	1024 x 600 pixels
Aspect ratio:	16:9
Brightness:	300 cd/m ²
Colors:	16.7 million
Reading angle:	H: 80° / V: 80°
Touch screen:	without touch
Glass hardness:	7H
Processor:	RK3288-Quad-Core Cortex-A17 up to 1.8GHz
RAM:	4 GB DDR3 RAM
Storage:	Onboard 32 GB eMMC NAND Flash
Interfaces:	USB: 2x USB 2.0 type A (1 port for firmware interface, convertible to standard USB) Serial: 2x RS-232 DB-9 Ethernet: 1x 10/100/1000 BaseT(X), RJ45 Display: 1x HDMI output Audio output: 3.5 mm jack Memory card slot: microSD slot Sim card slot: Standard SIM (without function as standard) WLAN: 1x 802.11a/b/g/n Bluetooth: 1x Bluetooth 4.0
Housing:	Robust aluminum housing
Assembly:	VESA 100 x 100 and/or 75 x 75 Panel mounting

Protection class:	Front IP65
Weight:	approx. 1.9 kg
Dimensions (WxHxD):	249 mm x 170 mm x 54.5 mm
Ambient conditions:	Operation: -10 °C to +60 °C Storage: -40 °C to +85 °C 5 % to 80 %rHn at 40 °C, non-condensing
Certifications:	CE FCC Class A CCC
Operating system:	Android
Browser:	Pre-installed Automation Browser from Ininet Starts automatically in full screen mode
Scope of delivery:	Device 1 x mounting material
Customs tariff number:	84714100
Manufacturer:	Wachendorff Process Technology

Drawings

Dimensions (mm):

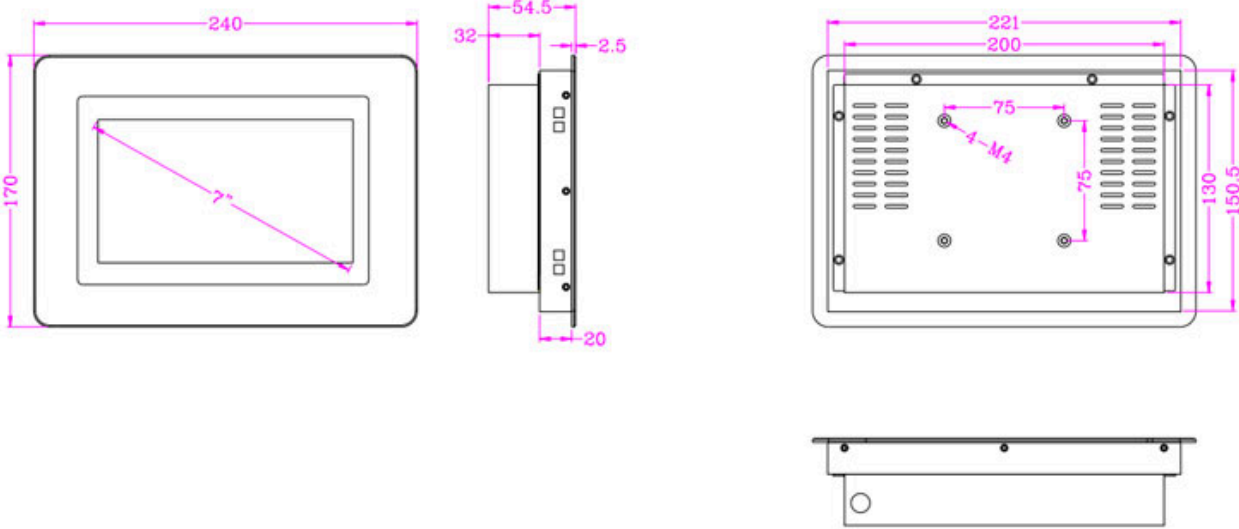



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

