

## Gateway BACnet/IP Server / Profibus Slave HD67676-IP-A1



Abbildungen ähnlich

- Read and write up to 2,000 BACnet objects
- Profibus data block size maximum 244 bytes
- High temperature range from -40 °C to +85 °C
- Galvanic 3-way isolation between BACnet / Profibus and power supply
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67676-IP-A1>

### Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

### Products Order no.

HD67676-IP-A1	Gateway BACnet/IP Server / Profibus Slave
---------------	---

### Product details


Interfaces:	1x Profibus (Sub-D socket, 9-pin) 2x Ethernet port (RJ45 socket)
BACnet objects:	Read and write up to 2,000 BACnet objects
Profibus data block size:	Input block maximum 244 bytes Output block maximum 244 bytes
LED:	6x signal display for supply and communication
Supply:	12 VDC to 35 VDC or 8 VAC to 24 VAC
Power consumption:	HD67676-IP-A1: 3.5 Watt / VA
Software:	Free configuration software SW67676 for parameterization of the device.
BBMD functionality:	This gateway only supports BBMD in a rudimentary way. No "Registration by Foreign Devices" and no NAT.
Profibus GSD file:	You can generate the required Profibus GSD file with the free free configuration software SW67676.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	Previous housing: PVC New housing: PC-ABS
Dimensions (WxHxD):	Previous housing: 23 mm x 107 mm x 120 mm New housing: 22.5 mm x 90.7 mm x 123 mm
Weight:	approx. 200 g
Fastening:	Mounting on the DIN rail
Note:	<b>The article description should always be viewed from the gateway's perspective.</b>  You can connect <b>masters</b> to the <b>HD67676</b> on the BACnet side and <b>masters</b> on the Profibus side.
Customs tariff number:	8517 62 00
Manufacturer:	ADFweb.com S.r.l.

### Accessories Order no.

DRS3-24	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 3 A, spring terminal
DRS4-24A	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m

**Drawings**


**Dimensions (previous housing)**

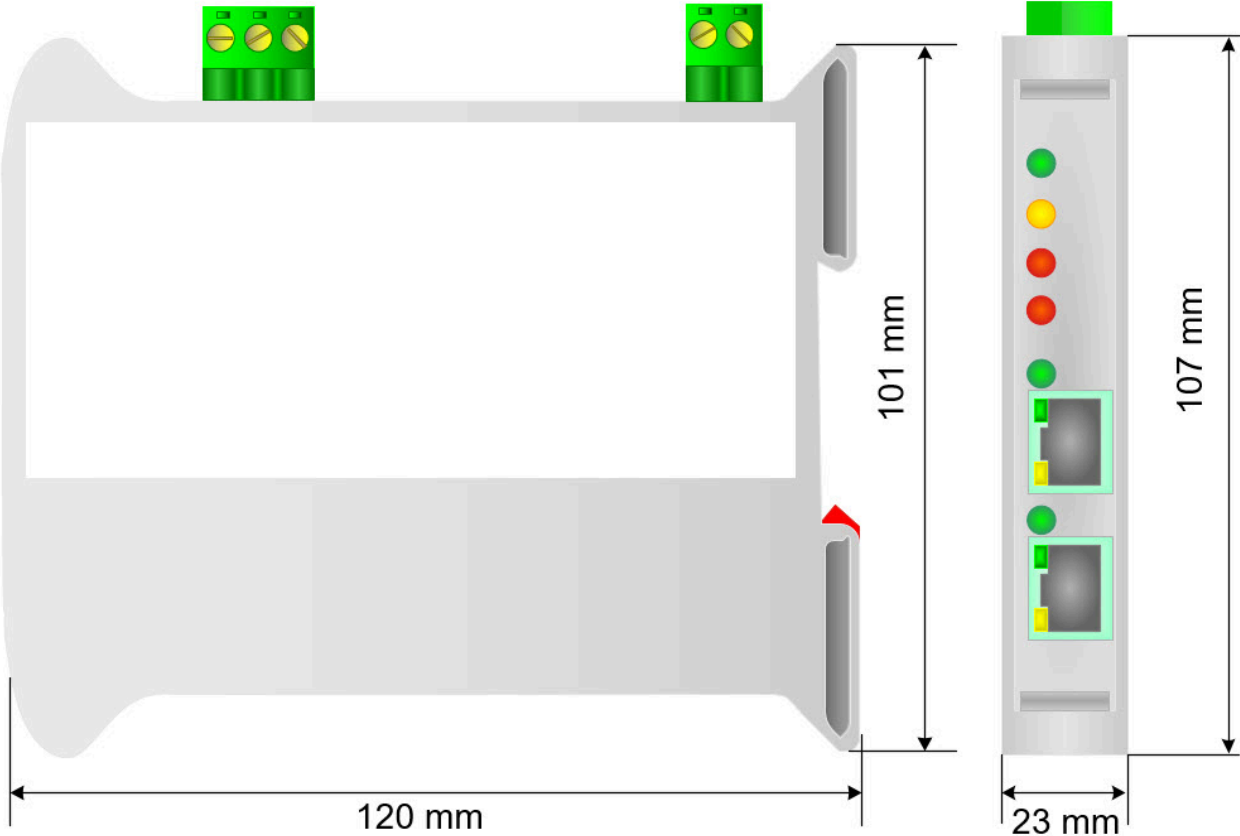

Gehäuse: PVC  
Gewicht: ca. 200g

**Drawings**

**Dimensions (new housing)**

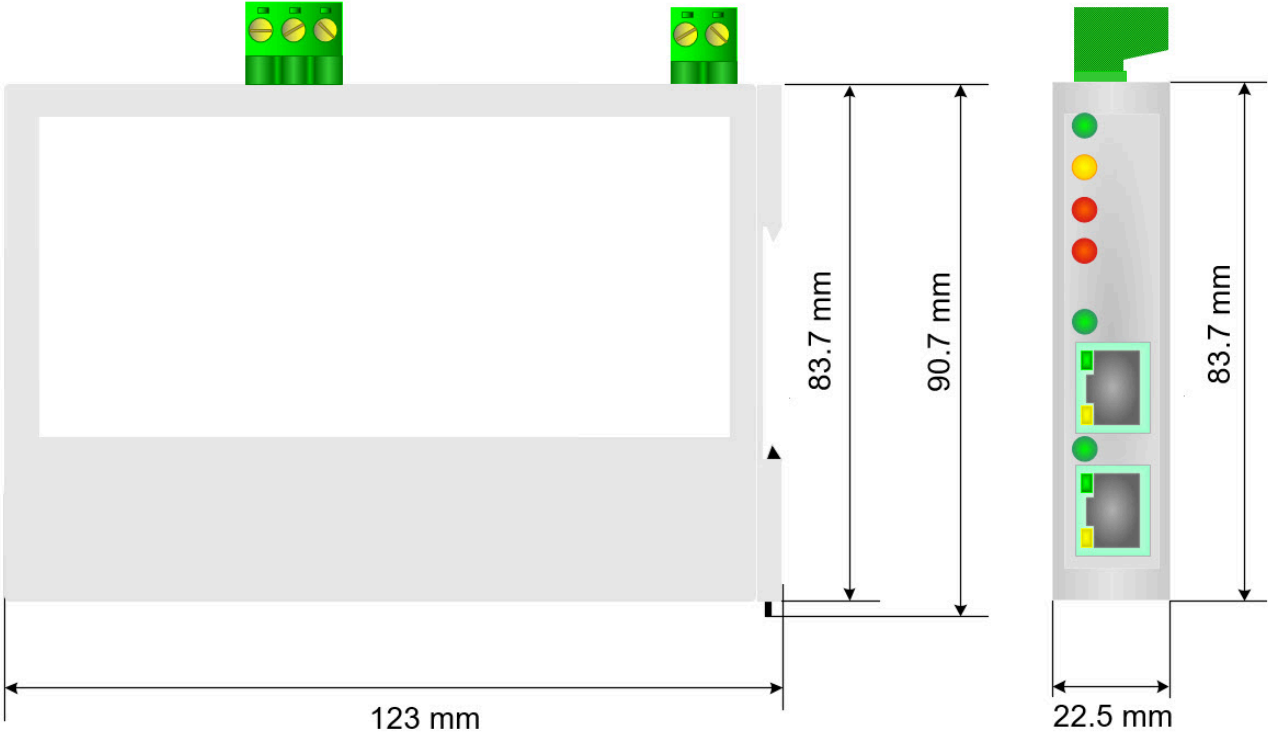

Gehäuse: PC-ABS  
Gewicht: ca. 200g



Wachendorff Prozesstechnik GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 (0) 67 22 / 99 65 - 20  
E-Mail: [wp@wachendorff.de](mailto:wp@wachendorff.de)  
[www.wachendorff-prozesstechnik.de](http://www.wachendorff-prozesstechnik.de)

