


# Gateway BACnet MS/TP Master / Profinet Slave HD67719-MS/TP-XX

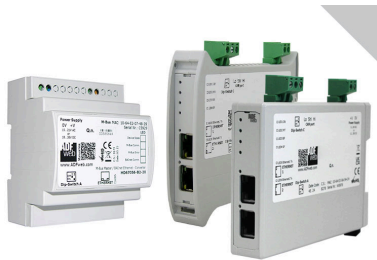

Abbildungen ähnlich

- Read and write up to 512 BACnet objects
- Profibus data block size maximum 1,440 bytes
- Data exchange between BACnet and Profinet
- Galvanic 3-way isolation between BACnet / Profinet and power supply
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67719-MSTP-XX>

## Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

## Product details

Interfaces:	HD67719-MS/TP-A1: 1x Ethernet port (RJ45 socket) 1x RS485 (removable screw terminal, 3-pin)
	HD67719-MS/TP-B2: 1x Ethernet port (RJ45 socket) 1x RS485 (screw terminal, 3-pin)
BACnet objects:	Read and write up to 512 BACnet objects
Profinet data block size:	Input block maximum 1,440 bytes Output block maximum 1,440 bytes
LED:	4x signal display for supply and communication
Supply:	HD67719-MS/TP-A1: 12 VDC to 35 VDC or 8 VAC to 24 VAC, 50/60HZ
	HD67719-MS/TP-B2: 12 VDC to 35 VDC or 8 VAC to 24 VAC, 50/60HZ
Power consumption:	HD67719-MS/TP-A1: 3.5 Watt / VA HD67719-MS/TP-B2: 3.5 Watt / VA
Software:	Free configuration software SW67719 for parameterization of the device.
BBMD functionality:	This gateway only supports BBMD in a rudimentary way. No "Registration by Foreign Devices" and no NAT.
Profinet XML file:	You can create the required Profinet XML file with the free free configuration software SW67719.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	Previous housing: PVC New housing: PC-ABS

Dimensions (WxHxD):	HD67719-MS/TP-A1: Previous housing: 23 mm x 107 mm x 120 mm New housing: 22.5 mm x 90.7 mm x 123 mm
---------------------	---

	HD67719-MS/TP-B2: 71 mm x 95 mm x 60 mm
--	--

Weight:	approx. 200 g
---------	---------------

Fastening:	Mounting on the DIN rail
------------	--------------------------

Note:	<b>The article description should always be viewed from the perspective of the gateway.</b>
-------	---

	You can connect <b>slaves</b> to the <b>HD67719</b> on the BACnet side and <b>masters</b> on the Profinet side.
--	---

Customs tariff number:	8517 62 00
------------------------	------------

Manufacturer:	ADFweb.com S.r.l.
---------------	-------------------

## Products Order no.

HD67719-MSTP-A1	Gateway BACnet MS/TP Master / Profinet Slave
-----------------	--

HD67719-MSTP-B2	Gateway BACnet MS/TP Master / Profinet Slave
-----------------	--

## Accessories Order no.

DRS4-24A	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
----------	---



AMR4-24	DIN rail power supply unit for building automation, 90 to 264 VAC, 24 VDC, 2.5 A
---------	--

KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
----------	---

KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
----------	---


KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m
----------	---

**Drawings**  
**Example application**

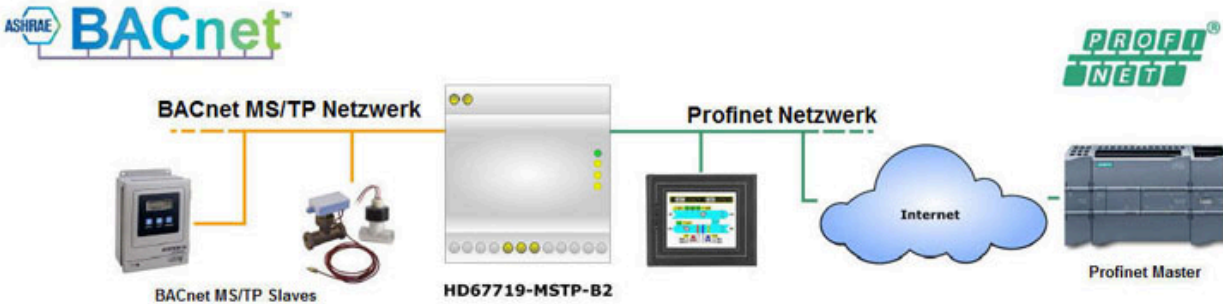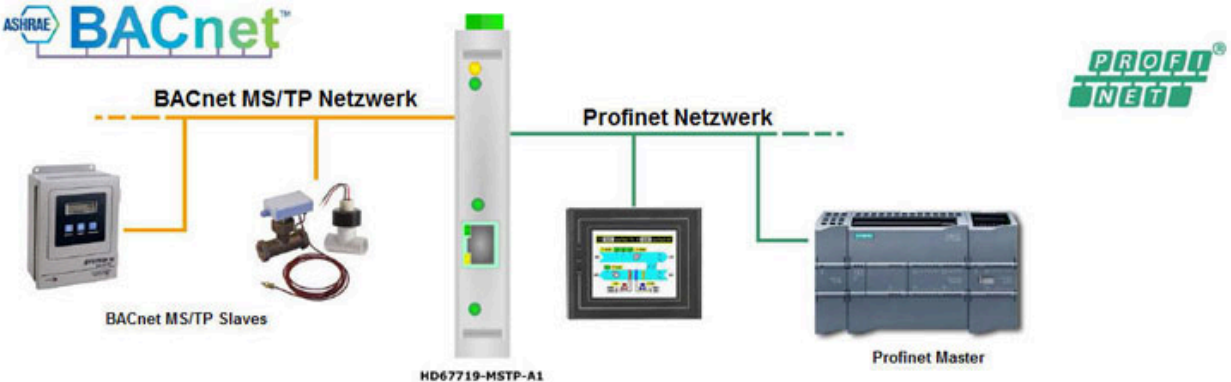

**Drawings**

**Dimensions A1 housing (previous housing)**

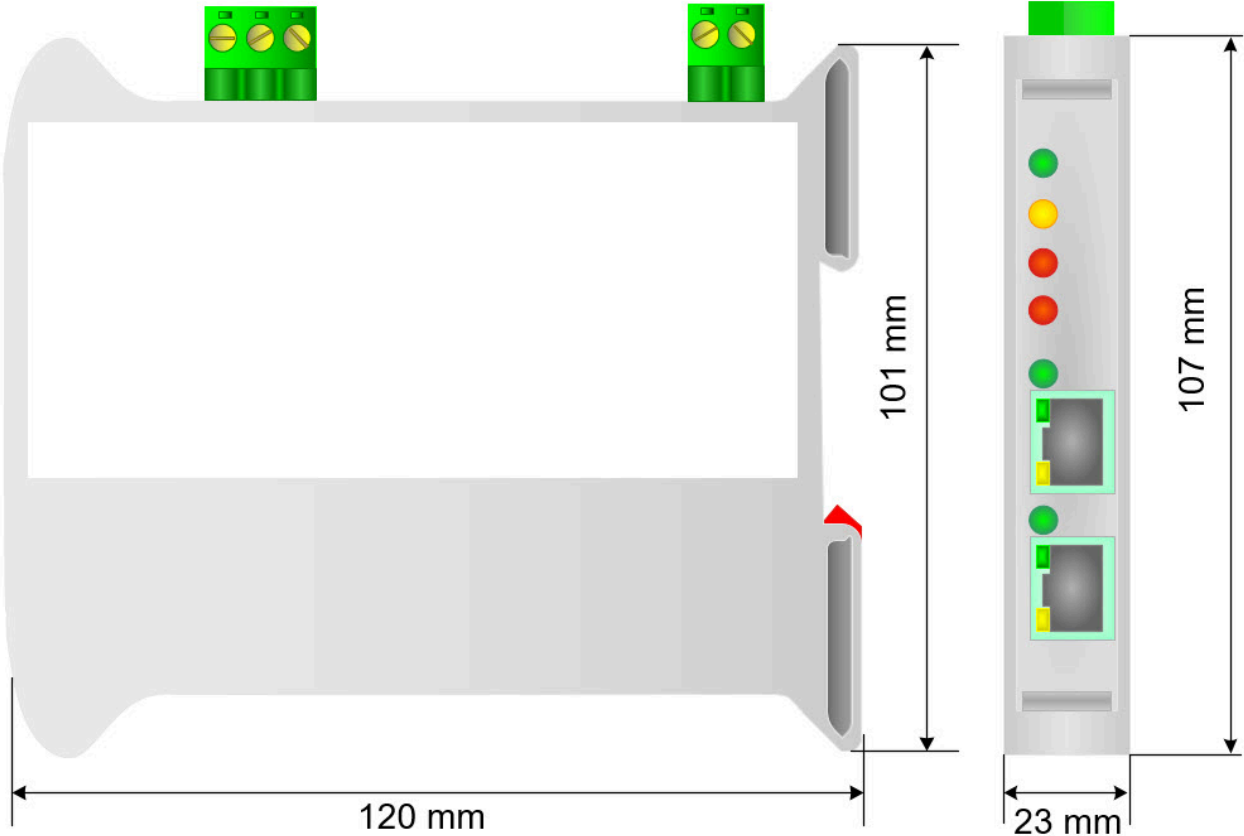

Gehäuse: PVC  
Gewicht: ca. 200g

**Drawings**


**Dimensions A1 housing (new housing)**



Gehäuse: PC-ABS  
Gewicht: ca. 200g

Drawings

Dimensions B2 Housing

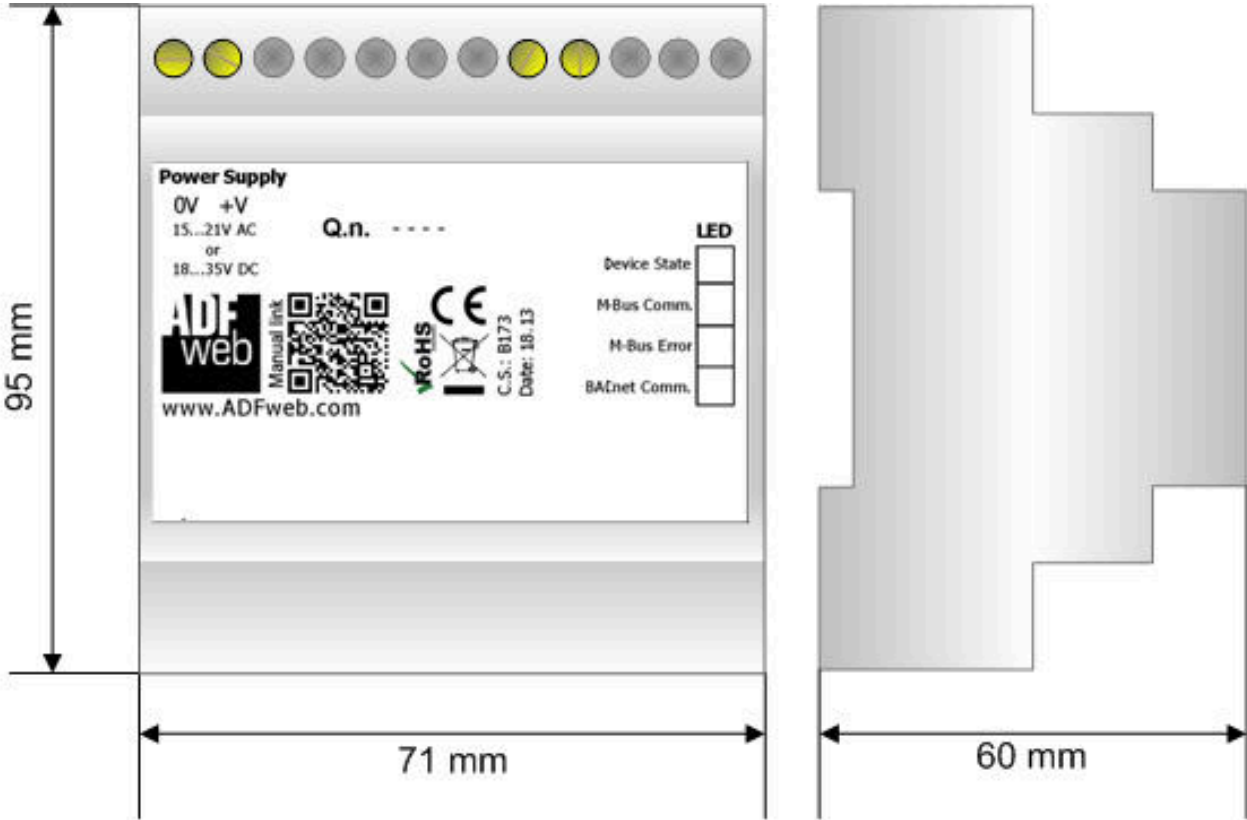

Gehäuse: PVC  
Gewicht: 200g (ca.)



Wachendorff Prozesstechnik GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 (0) 67 22 / 99 65 - 20  
E-Mail: [wp@wachendorff.de](mailto:wp@wachendorff.de)  
[www.wachendorff-prozesstechnik.de](http://www.wachendorff-prozesstechnik.de)

