

CAN bus repeater for J1939 HD67182



Abbildung ähnlich

- for professional use
- Enables extension of a line segment
- galvanic isolation of the CAN branches
- Extension of the number of nodes
- Protocol-independent

<https://www.wachendorff-prozesstechnik.de/en/HD67182>

Description

The HD67182 repeater solves your line extension problems and is ideal for galvanic isolation. It is suitable for use in motors and devices with electromagnetic interference. Suitable as a repeater in the following bus protocols: J1939 and complies with the generic standard ISO 11898. 16-bit microprocessor is used for internal data processing. Two-sided programming of the transmission rate is generally possible, whereby the maximum transmission rate is 1 Mbps (at 25 meters). Several devices can be inserted in the same network. Top-hat rail mounting and plug-in screw terminals ensure quick and safe installation and easy wiring of the device.

Accessories Order no.

| | |
|----------|---|
| DRS4-24A | Power supply unit for top-hat rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal |
| AC34107 | Null modem cable, socket/socket, 3 m long |


Product details

| | |
|-------------------------|---|
| Interfaces: | 2x CAN (removable screw terminal, 3-pin) |
| Max. Distance: | 5,000m for 10k bps; 25m for 1Mbps |
| Possible baud rates: | 10 Kbps, 20 Kbps, 50Kbps, 62.5 Kbps, 100 Kbps, 125 Kbps, 250 Kbps, 500 Kbps, 800 Kbps, 1,000 Kbps |
| Galv. separation: | 1 KV |
| Standard: | ISO 11898 |
| DIP switch: | 8 pieces for setting the different baud rates. |
| LED: | 3x signal display for supply and communication. |
| Supply: | 10 VDC to 35 VDC, 4Watt 10 VAC to 19 VAC, 4 VA, 50/60 Hz |
| Operating temperature: | -40°C to +85°C |
| Humidity: | 10% to 80% , non-condensing |
| CE conformity: | EN61000-6-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11, ENV50204 |
| EMC Directive: | EMC2004/108/CE |
| Dimensions (W x H x D): | 23 mm x 107 mm x 120 mmm |
| Weight: | approx. 200g |
| Housing: | PVC |
| Fastening: | Mounting on the DIN top-hat rail. |
| Customs tariff number: | 8517 62 00 |
| Manufacturer: | ADFweb.com S.r.l. |

Products Order no.

Drawings

Dimension

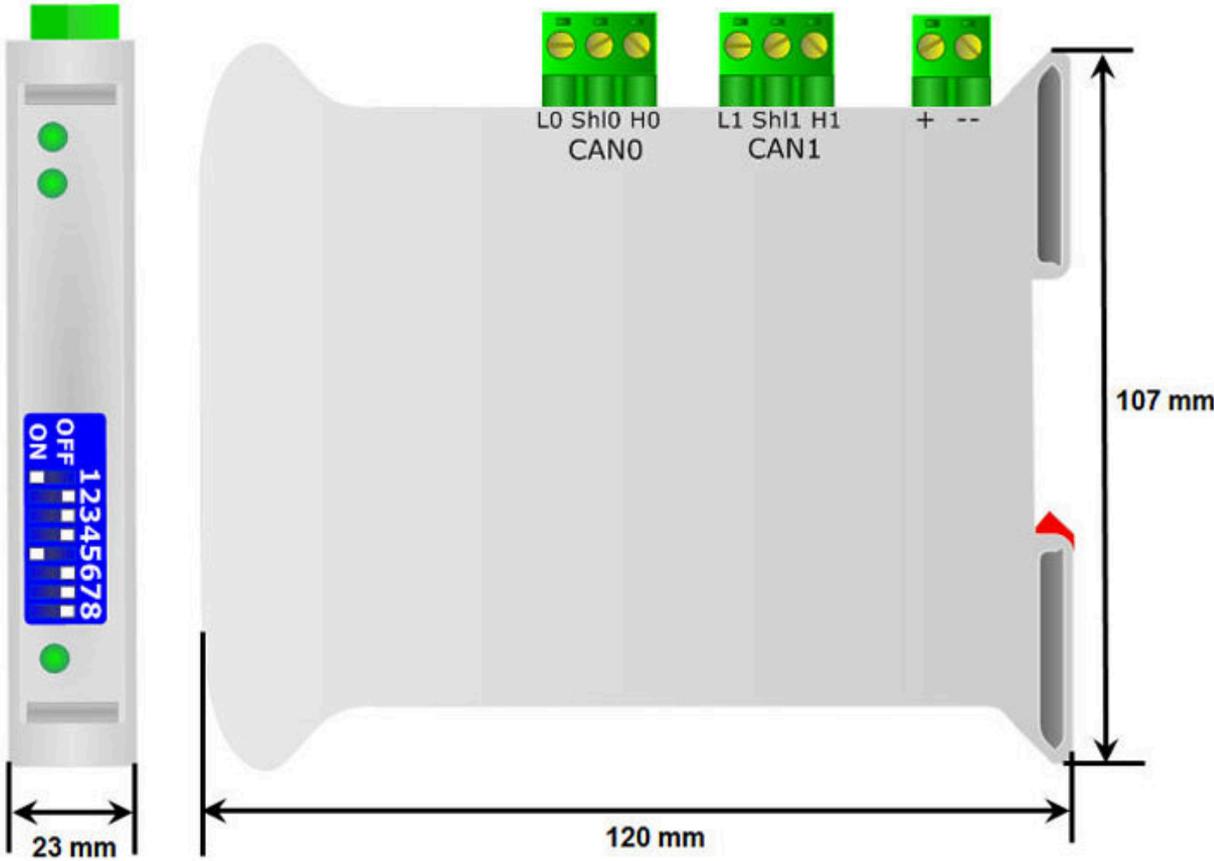

Drawings


Step file



The step file .pdf is for viewing. You can find the step file for download in the Downloads / FAQ tab
HD67181.pdf

Drawings

Connection diagram

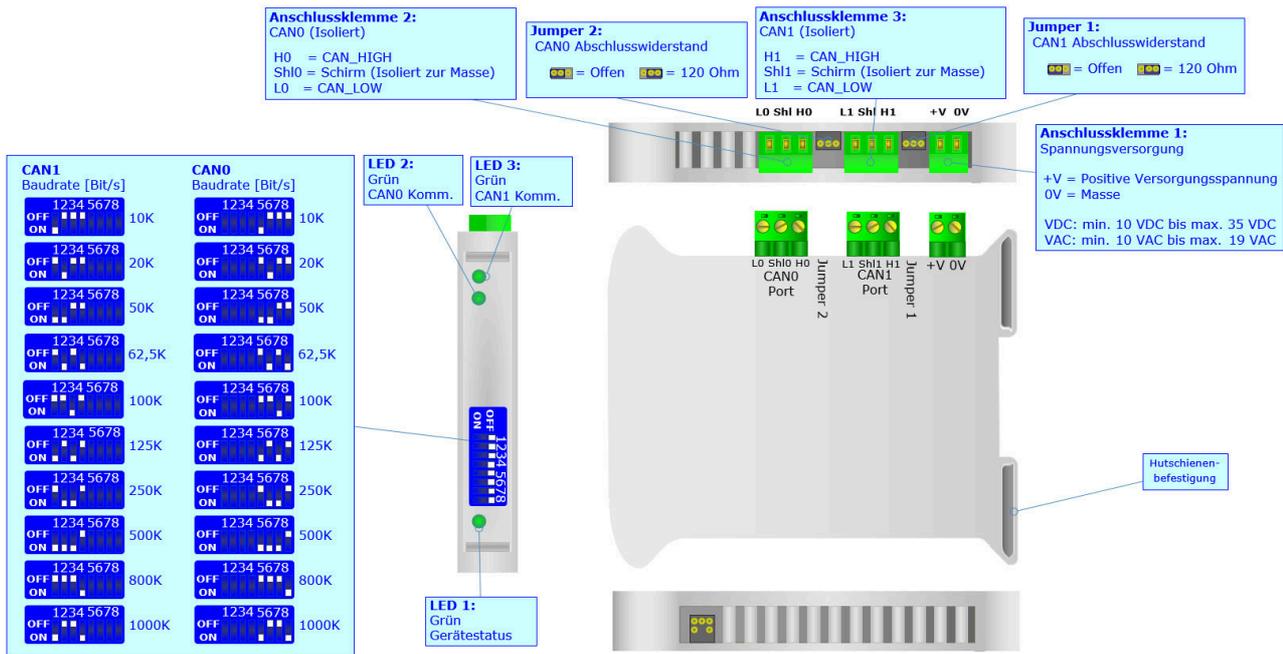

HD67181.pdf



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

