

## Gateway EtherNet/IP Server (Slave) / CANopen HD67596-A1



Abbildungen ähnlich

- Up to 496 bytes each in read and write mode
- Bidirectional connection between EtherNet/IP and CANopen
- High temperature range from -40 °C to +85 °C
- Galvanic isolation
- Power supply 8 to 24 VAC or 12 to 35 VDC
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67596-A1>

### Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

### Product details

Interfaces:	1x CANopen (removable screw terminal, 3-pin) 2x Ethernet port (RJ45 socket)
LED:	6x signal display for supply and communication
Supply:	12 VDC to 35 VDC or 8 VAC to 24 VAC
Power consumption:	3.5 Watt / VA
Software:	Free configuration software SW67596 for parameterization of the device.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	Previous housing: PVC New housing: PC-ABS
Dimensions (WxHxD):	Previous housing: 23 mm x 107 mm x 120 mm New housing: 22.5 mm x 90.7 mm x 123 mm
Weight:	approx. 200 g
Fastening:	Mounting on the DIN rail
Customs tariff number:	8517 62 00
Manufacturer:	ADFweb.com S.r.l.


### Products Order no.

HD67596-A1	Gateway EtherNet/IP Server / CANopen
------------	--------------------------------------

### Accessories Order no.


DRS4-24A	Power supply unit for top-hat rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m

**Drawings**  
**Example application**

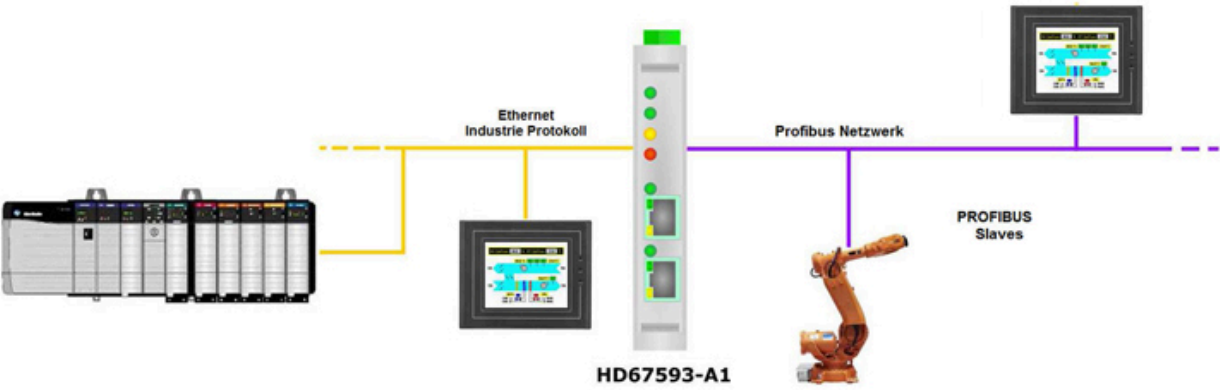

**Drawings**

**Dimensions (previous housing)**

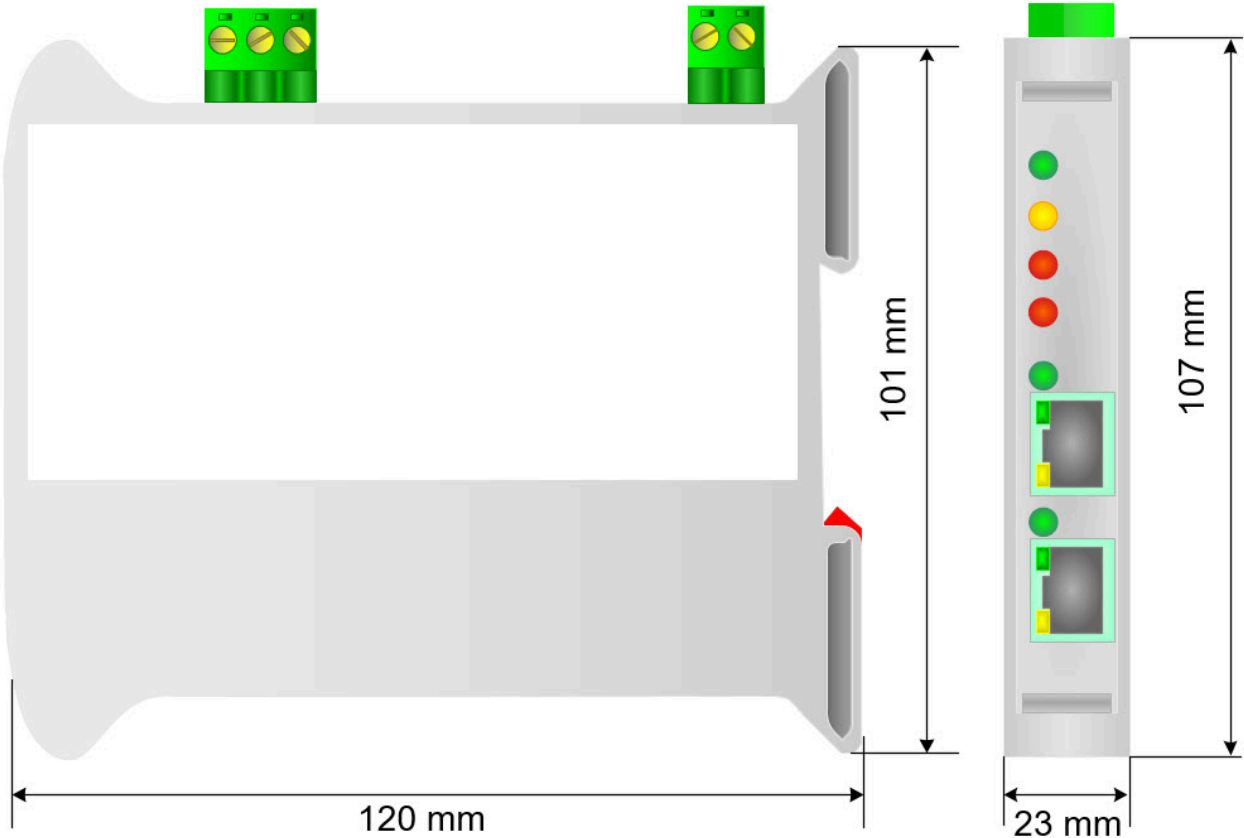

Gehäuse: PVC  
Gewicht: ca. 200g

**Drawings**

**Dimensions (new housing)**



Gehäuse: PC-ABS  
Gewicht: ca. 200g



Wachendorff Prozesstechnik GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 (0) 67 22 / 99 65 - 20  
E-Mail: [wp@wachendorff.de](mailto:wp@wachendorff.de)  
[www.wachendorff-prozesstechnik.de](http://www.wachendorff-prozesstechnik.de)

