

## Gateway EtherNet/IP Server (Slave) / CANopen HD67596-A1



Abbildungen ähnlich

- Up to 496 bytes each in read and write mode
- Bidirectional connection between EtherNet/IP and CANopen
- High temperature range from -40 °C to +85 °C
- Galvanic isolation
- Power supply 8 to 24 VAC or 12 to 35 VDC
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67596-A1>

### Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

### Product details

|                        |  |
|------------------------|--|
| Interfaces:            | 1x CANopen (removable screw terminal, 3-pin)<br>2x Ethernet port (RJ45 socket)       |
| LED:                   | 6x signal display for supply and communication                                       |
| Supply:                | 12 VDC to 35 VDC or<br>8 VAC to 24 VAC   |
| Power consumption:     | 3.5 Watt / VA  |
| Software:              | Free configuration software SW67596 for parameterization of the device.              |
| Operating temperature: | -40 °C to +85 °C   |
| Humidity:              | 10 % to 80 %, non-condensing   |
| Housing:               | Previous housing: PVC<br>New housing: PC-ABS   |
| Dimensions (WxHxD):    | Previous housing: 23 mm x 107 mm x 120 mm<br>New housing: 22.5 mm x 90.7 mm x 123 mm |
| Weight:                | approx. 200 g  |
| Fastening:             | Mounting on the DIN rail   |
| Customs tariff number: | 8517 62 00   |
| Manufacturer:          | ADFweb.com S.r.l.  |

### Products Order no.


|            |                                      |
|------------|--------------------------------------|
| HD67596-A1 | Gateway EtherNet/IP Server / CANopen |
|------------|--------------------------------------|

### Accessories Order no.

|          |   |
|----------|---|
| DRS4-24A | Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal |
| KABETH10 | Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m                               |
| KABETH11 | Patch cable, RJ45 UTP CCA, CAT5e white, 1 m                                 |
| KABETH12 | Patch cable, RJ45 UTP CCA, CAT5e white, 2 m                                 |


**Drawings**

**Example application**

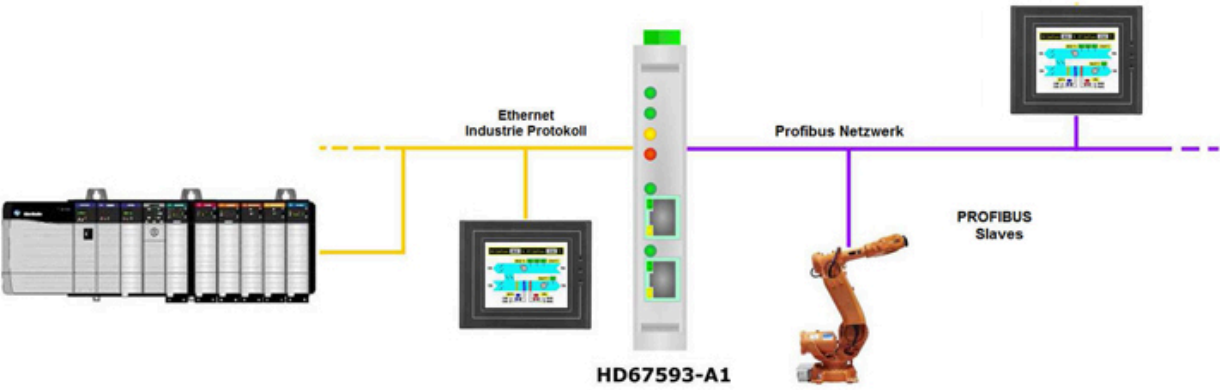

**Drawings**

**Dimensions (previous housing)**

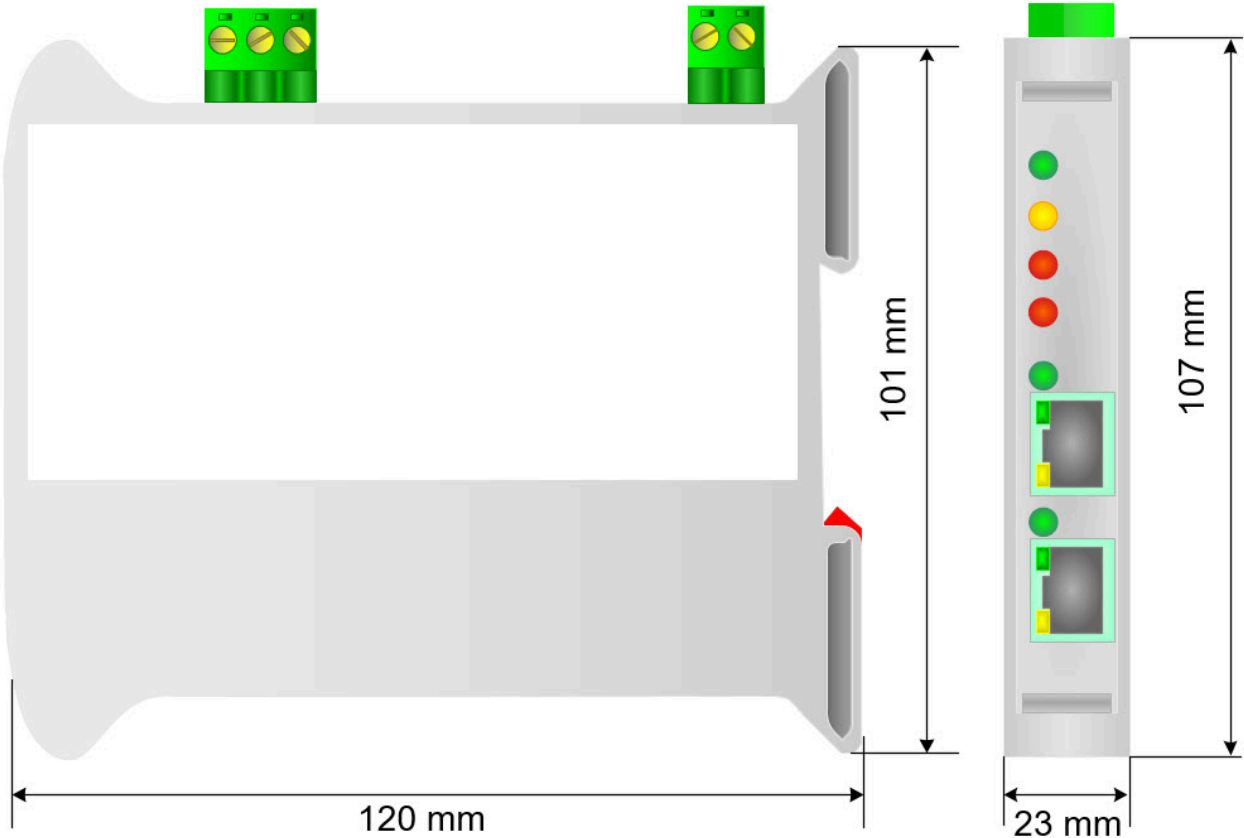

Gehäuse: PVC  
Gewicht: ca. 200g

**Drawings**

**Dimensions (new housing)**



Gehäuse: PC-ABS  
Gewicht: ca. 200g



Wachendorff Prozesstechnik GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 (0) 67 22 / 99 65 - 20  
E-Mail: [wp@wachendorff.de](mailto:wp@wachendorff.de)  
[www.wachendorff-prozesstechnik.de](http://www.wachendorff-prozesstechnik.de)

