

Gateway DMX / Profinet Slave HD67614-B2



Abbildung ähnlich

- Provision of up to 512 DMX channels
- Profinet data block size maximum 1,440 bytes
- High temperature range from -40 °C to +85 °C
- Galvanic 3-way isolation between Ethernet / DMX and power supply
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67614-B2>

Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

Product details

Interfaces:	1x Ethernet port (RJ45 socket) 1x RS485 (screw terminal, 3-pin)
Profinet data block size:	Input block size maximum 1,440 bytes Output block size maximum 1,440 bytes
DMX channels:	Provision of up to 512 DMX channels (1 byte each)
LED:	5x signal display for supply and communication
Supply:	12 VDC to 35 VDC or 8 VAC to 24 VAC
Power consumption:	HD67614-B2: 3.5 Watt / VA
Software:	Free configuration software SW67614 for parameterization of the device.
Profinet XML file:	You can generate the required Profinet XML file with the free free configuration software SW67614.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	PVC
Dimensions (WxHxD):	71 mm x 95 mm x 60 mm
Weight:	approx. 200 g
Fastening:	Mounting on the DIN rail
Customs tariff number:	8517 62 00
Manufacturer:	ADFweb.com S.r.l.

KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m

Products Order no.


HD67614-B2	Gateway DMX / Profinet Slave
------------	------------------------------

Accessories Order no.

AMR4-24	DIN rail power supply unit for building automation, 90 to 264 VAC, 24 VDC, 2.5 A
---------	----------------------------------------------------------------------------------------


Drawings

Example application

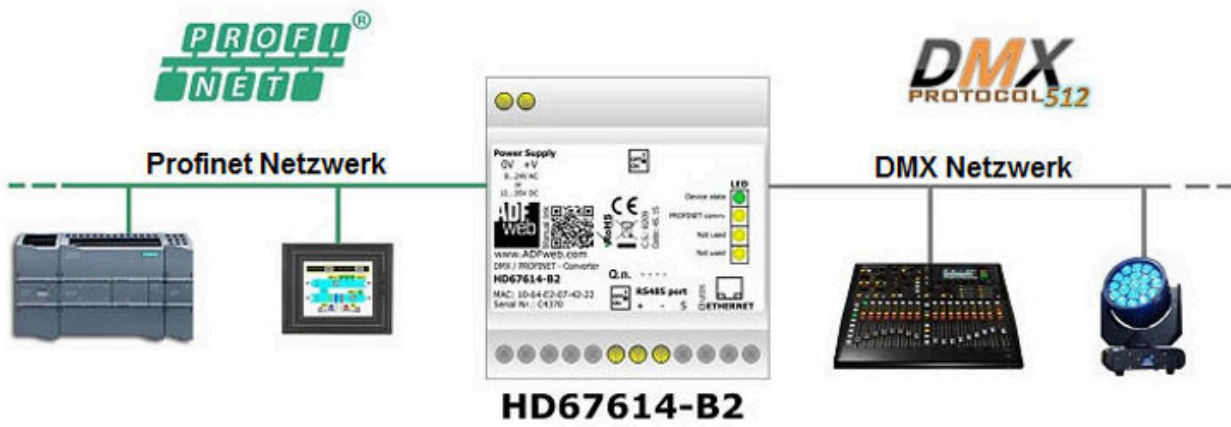

Drawings

Dimensions

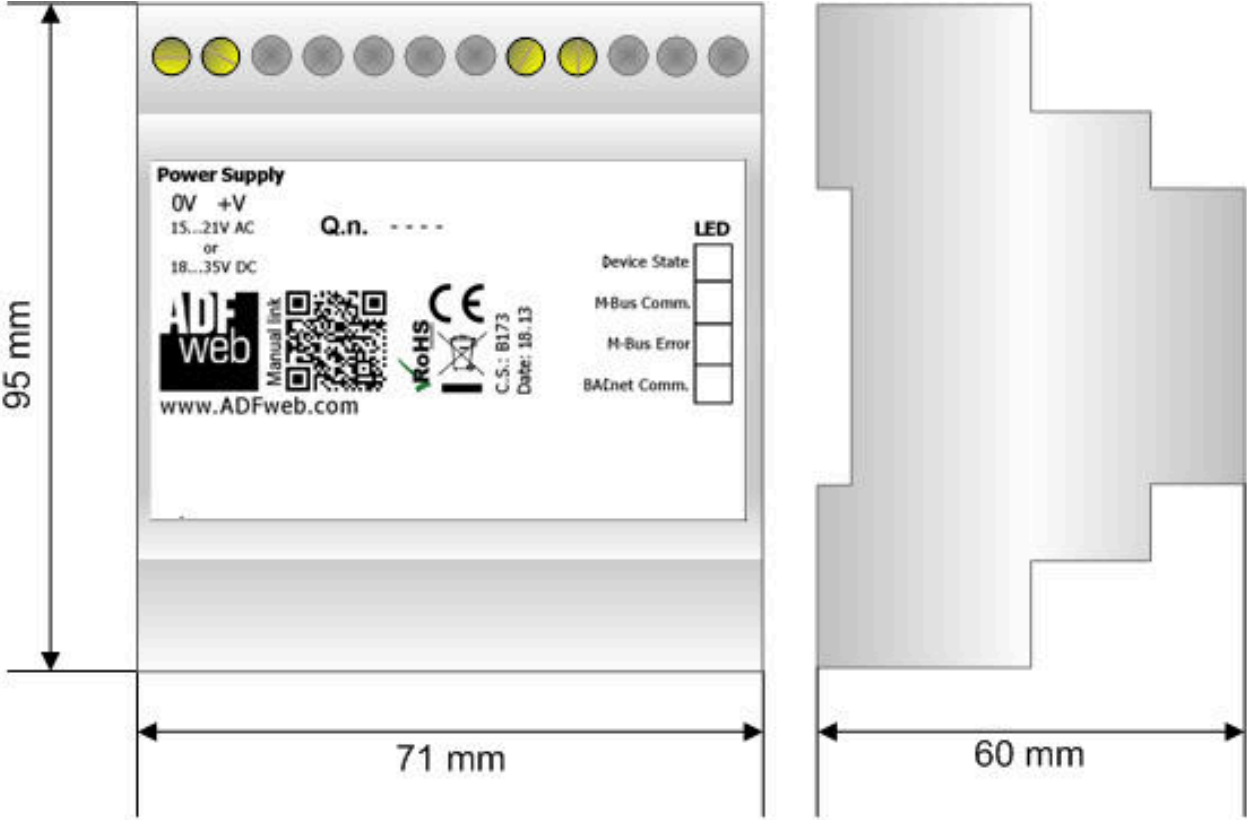

Gehäuse: PVC
Gewicht: 200g (ca.)



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

