

Gateway Profinet Slave / Profibus Slave HD67605-A1



Abbildungen ähnlich

- Profinet data block size maximum 1,440 bytes
- Profibus data block size maximum 244 bytes
- High temperature range from -40 °C to +85 °C
- Galvanic 3-way isolation between Profinet / Profibus and power supply
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67605-A1>

Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

Product details

Interfaces:	1x Profibus (Sub-D socket, 9-pin) 2x Ethernet port (RJ45 socket) for Profinet
Profinet data block size:	Input block size maximum 1,440 bytes Output block size maximum 1,440 bytes
Profibus data block size:	Input block size maximum 244 bytes Output block size maximum 244 bytes
LED:	6x signal display for supply and communication
Supply:	12 VDC to 35 VDC or 8 VAC to 24 VAC
Power consumption:	HD67605-A1: 3.5 Watt / VA
Software:	Free configuration software SW67605 for parameterization of the device.
Profinet XML file:	You can generate the required Profinet XML file with the free configuration software SW67605.
Profibus GSD file:	You can generate the required Profibus GSD file with the free configuration software SW67605.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	Previous housing: PVC New housing: PC-ABS
Dimensions (WxHxD):	Previous housing: 23 mm x 107 mm x 120 mm New housing: 22.5 mm x 90.7 mm x 123 mm
Weight:	approx. 200 g
Fastening:	Mounting on the DIN rail

Note:

The article description should always be viewed from the gateway's perspective.

You can connect **masters** to the **HD67605** on the Profinet side and **masters** on the Profibus side.

Customs tariff number: 8517 62 00

Manufacturer: ADFweb.com S.r.l.


Products Order no.

HD67605-A1	Gateway Profinet Slave / Profibus Slave
------------	---

Accessories Order no.


DRS3-24	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 3 A, spring terminal
DRS4-24A	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m

Drawings
Example application

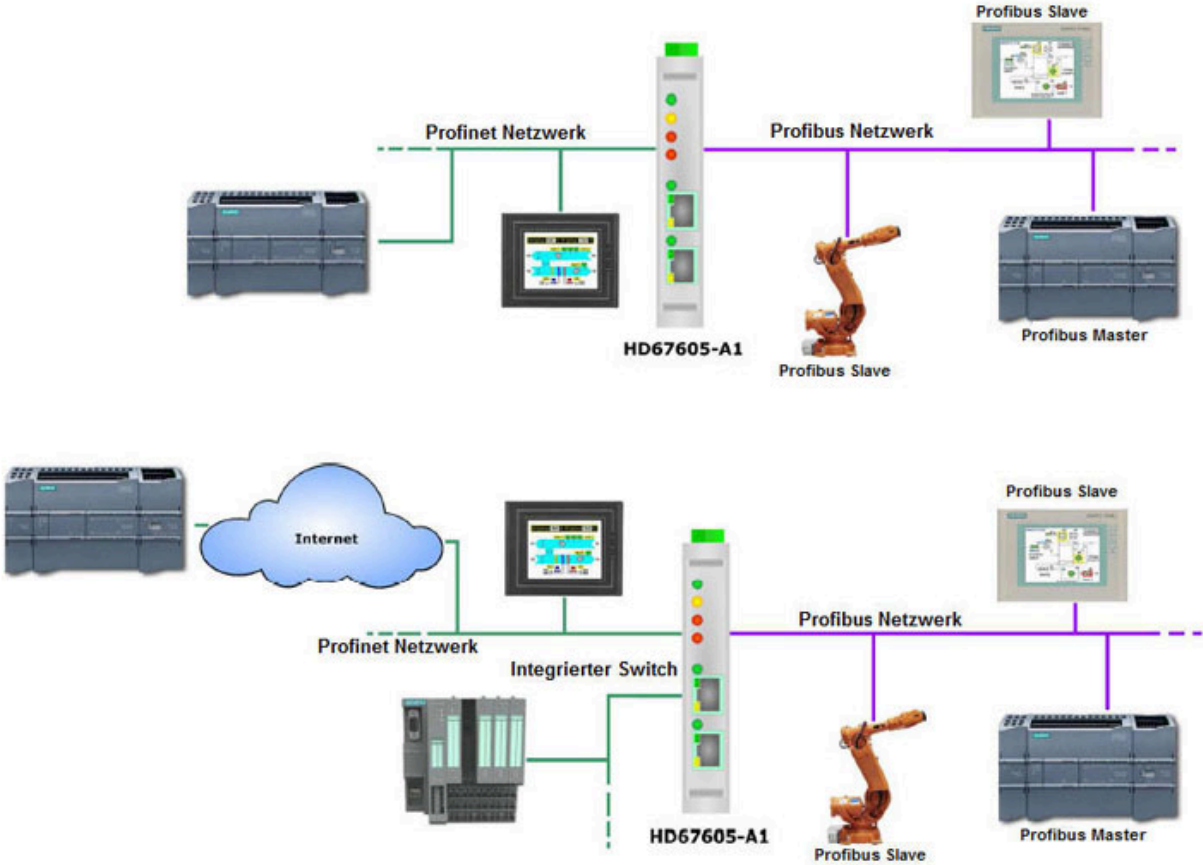

Drawings

Dimensions (previous housing)

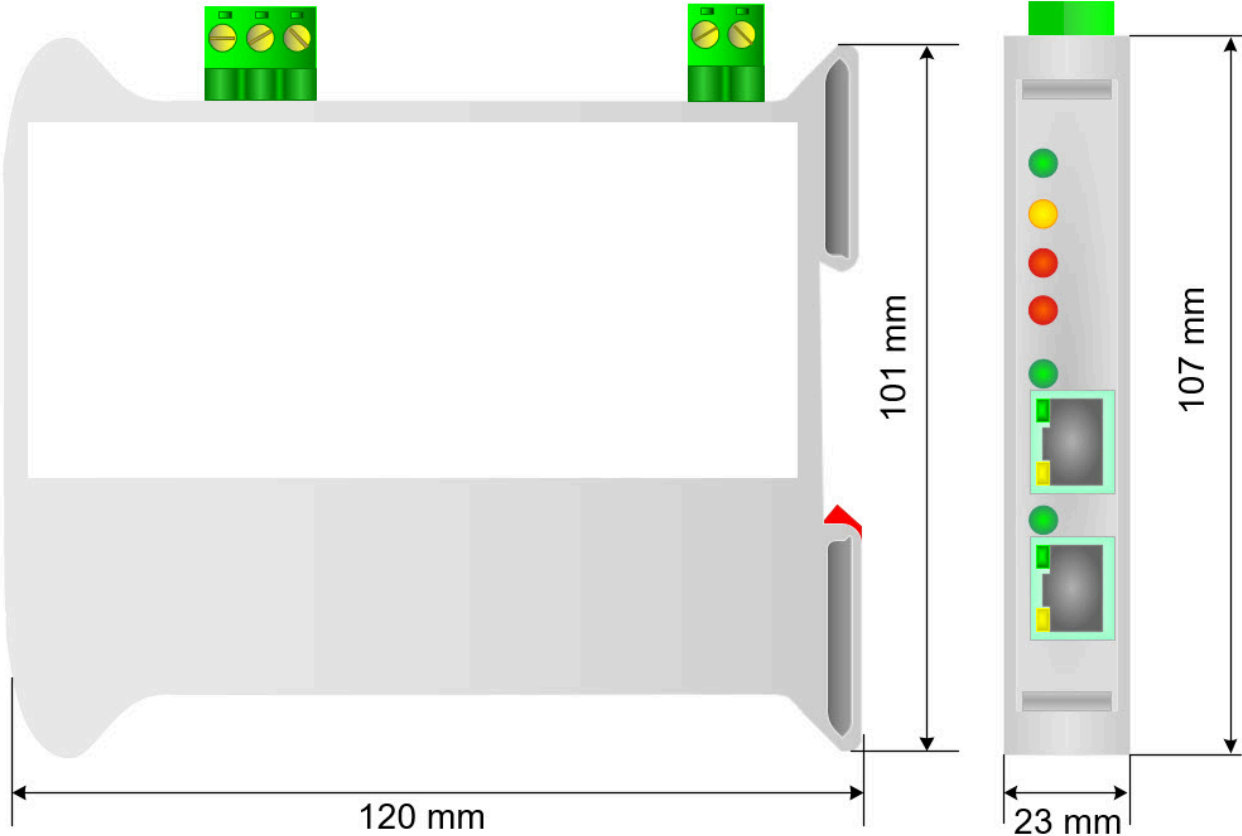

Gehäuse: PVC
Gewicht: ca. 200g

Drawings

Dimensions (new housing)



Gehäuse: PC-ABS
Gewicht: ca. 200g



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

