


RS232 interface module



RS232 interface module for the PM-50 base unit

- Removable terminal strip
- Hardware status LEDs

<https://www.wachendorff-prozesstechnik.de/en/PMM000CM2320000>

Description

The RS232 interface module quickly and easily adds an RS232 interface to the PM-50 graphic display.

Product details


Interface:	1x RS232
Baud rate:	300 to 115200 kbit/s
Parity:	odd, even or no parity
Data bits:	7 or 8
Power supply:	Via the PM-50 base module Maximum power: 0.55 W
Isolation:	1000 Vrms for 1min
Weight:	39,7 g
Operating temperature:	-10 °C to + 55°C
Relative humidity:	0 % to 85 %, non-condensing
Protection class:	IP20
Dimensions (WxHxD):	44.8 mm x 44.8 mm x 34.1 mm
Note:	Each expansion module (RS232, Ethernet, analog output, relay, AC power supply) can only be plugged in / installed once.
Manufacturer:	Red Lion

Products Order no.


PMM000CM2320000	RS232 interface module for PM-50
-----------------	----------------------------------

Drawings

Dimensions in inches (mm)

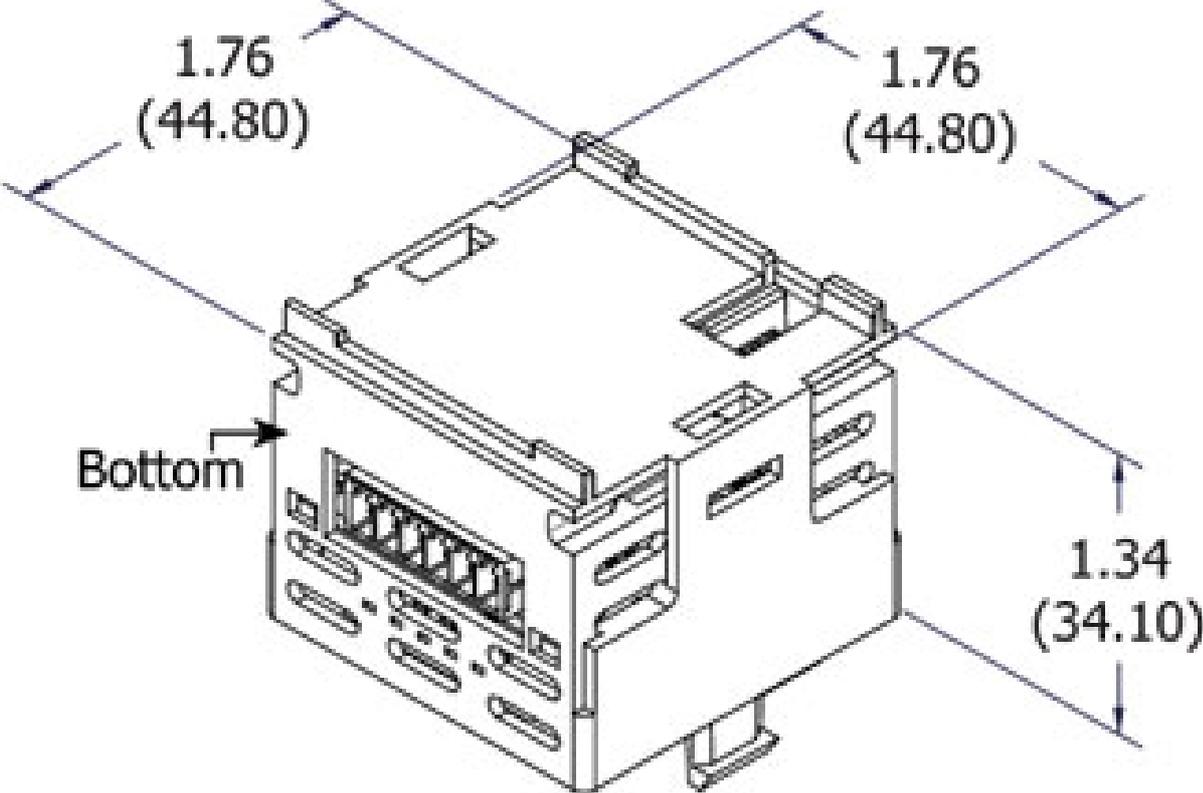

LEDs

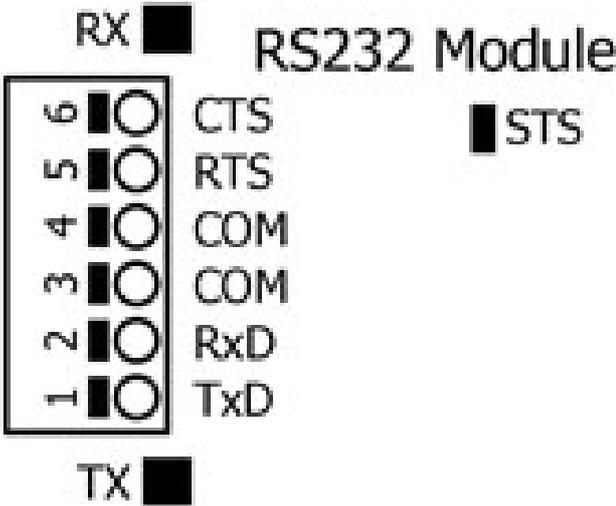

STS

LED will blink fast when initializing. LED will be solid when running normally.

RX/TX

The transmit LED(TX) will flash when information is transmitted from the RS232 module. The receive LED(RX) will flash when information is received.



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

