

Gateway BACnet MS/TP Slave / CANopen HD67678-MS/TP-XX



Abbildungen ähnlich

- Read and write up to 2,048 BACnet objects
- Bidirectional data exchange between BACnet and CANopen
- High temperature range from -40 °C to +85 °C
- Galvanic 3-way isolation between BACnet / CANopen and power supply
- Transmission of project planning via Ethernet

<https://www.wachendorff-prozesstechnik.de/en/HD67678-MSTP-XX>

Description

Further information on this gateway is available on request. Please get in touch with the contact persons listed below.

Product details

Interfaces:	<p>HD67678-MS/TP-A1: 1x Ethernet port (RJ45 socket) 1x CANopen (removable screw terminal, 3-pin) 1x RS485 (removable screw terminal, 3-pin)</p> <p>HD67678-MS/TP-B2: 1x Ethernet port (RJ45 socket) 1x CANopen (screw terminal, 3-pin) 1x RS485 (screw terminal, 3-pin)</p>
BACnet objects:	Read and write up to 2,048 BACnet objects
LED:	5x signal display for supply and communication
Supply:	<p>HD67678-MS/TP-A1: 12 VDC to 35 VDC or 8 VAC to 24 VAC, 50/60HZ</p> <p>HD67678-MS/TP-B2: 12 VDC to 35 VDC or 8 VAC to 24 VAC, 50/60HZ</p>
Power consumption:	<p>HD67678-MS/TP-A1: 3.5 Watt / VA</p> <p>HD67678-MS/TP-B2: 3.5 Watt / VA</p>
Software:	Free configuration software SW67678 for parameterization of the device
BBMD functionality:	This gateway only supports BBMD in a rudimentary way. No "Registration by Foreign Devices" and no NAT.
Operating temperature:	-40 °C to +85 °C
Humidity:	10 % to 80 %, non-condensing
Housing:	<p>Previous housing: PVC</p> <p>New housing: PC-ABS</p>

Dimensions (WxHxD):	<p>HD67678-MS/TP-A1: Previous housing: 23 mm x 107 mm x 120 mm New housing: 22.5 mm x 90.7 mm x 123 mm</p> <p>HD67678-MS/TP-B2: 71 mm x 95 mm x 60 mm</p>
Weight:	approx. 200 g
Fastening:	Mounting on the DIN rail
Note:	<p>The article description should always be viewed from the gateway's perspective.</p> <p>You can connect masters to the HD67678 on the BACnet side.</p>
Customs tariff number:	8517 62 00
Manufacturer:	ADFweb.com S.r.l.


Products Order no.

HD67678-MSTP-A1	Gateway BACnet MS/TP Slave / CANopen
HD67678-MSTP-B2	Gateway BACnet MS/TP Slave / CANopen

Accessories Order no.


DRS4-24A	Power supply unit for DIN rail, 85 to 264 VAC, 24 VDC 4.2 A, screw terminal
AMR4-24	DIN rail power supply unit for building automation, 90 to 264 VAC, 24 VDC, 2.5 A
KABETH10	Patch cable, RJ45 UTP CCA, CAT5e white, 0.3 m
KABETH11	Patch cable, RJ45 UTP CCA, CAT5e white, 1 m
KABETH12	Patch cable, RJ45 UTP CCA, CAT5e white, 2 m

Drawings
Example application

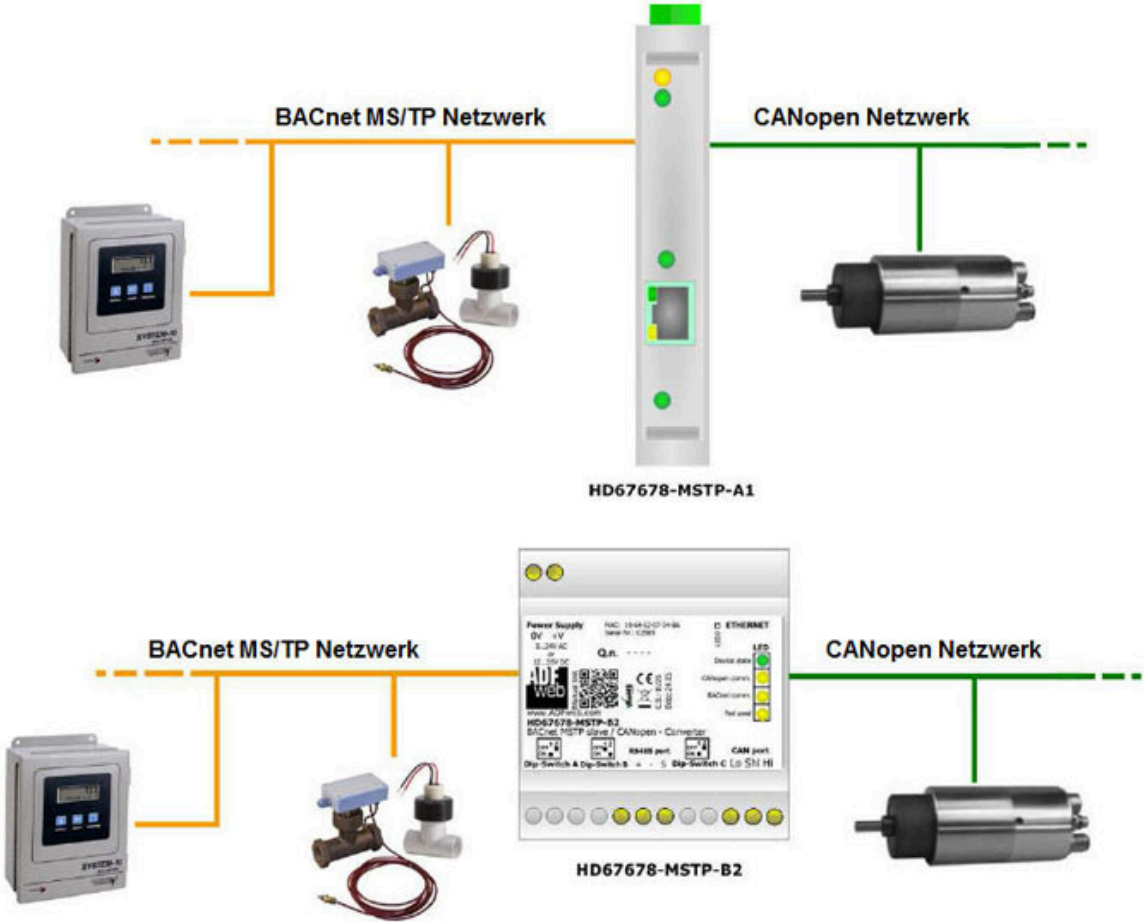

Drawings

Dimensions A1 housing (previous housing)

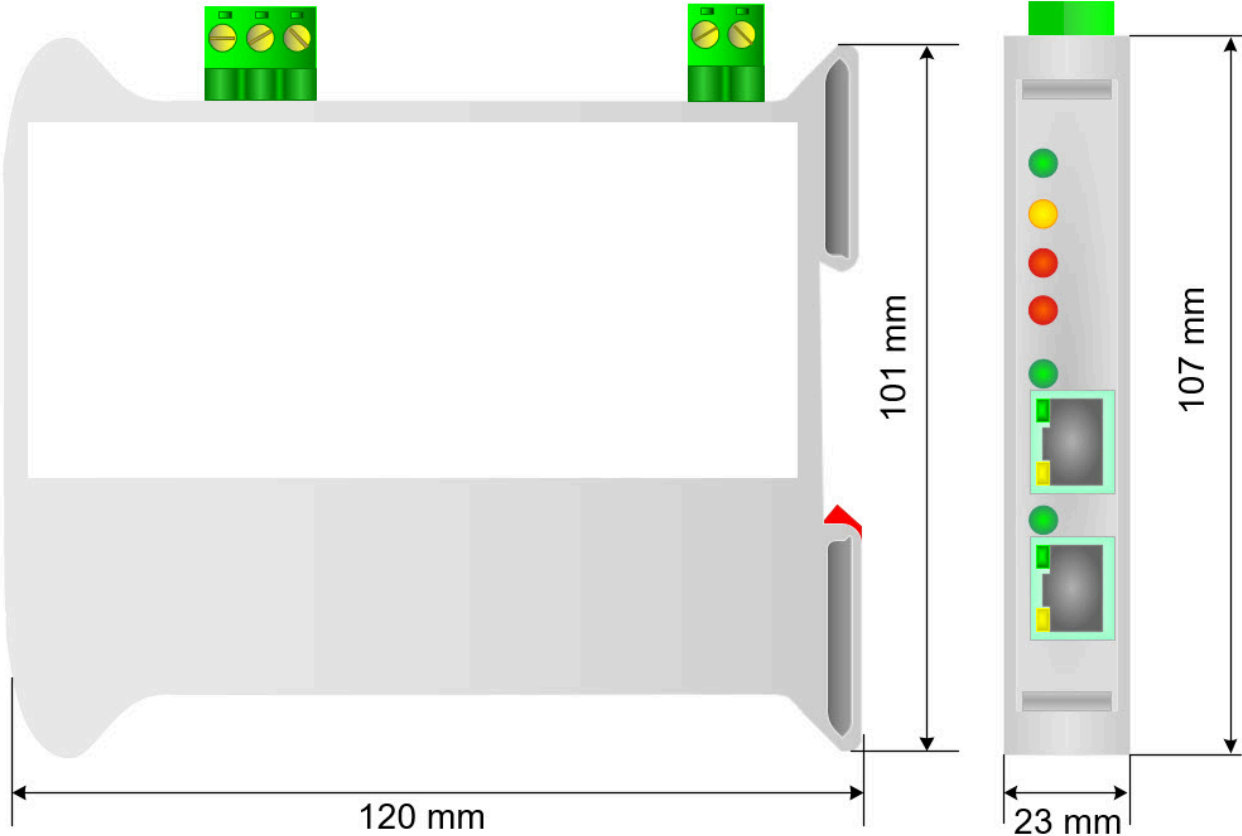

Gehäuse: PVC
Gewicht: ca. 200g

Drawings


Dimensions A1 housing (new housing)



Gehäuse: PC-ABS
Gewicht: ca. 200g

Drawings

Dimensions B2 Housing

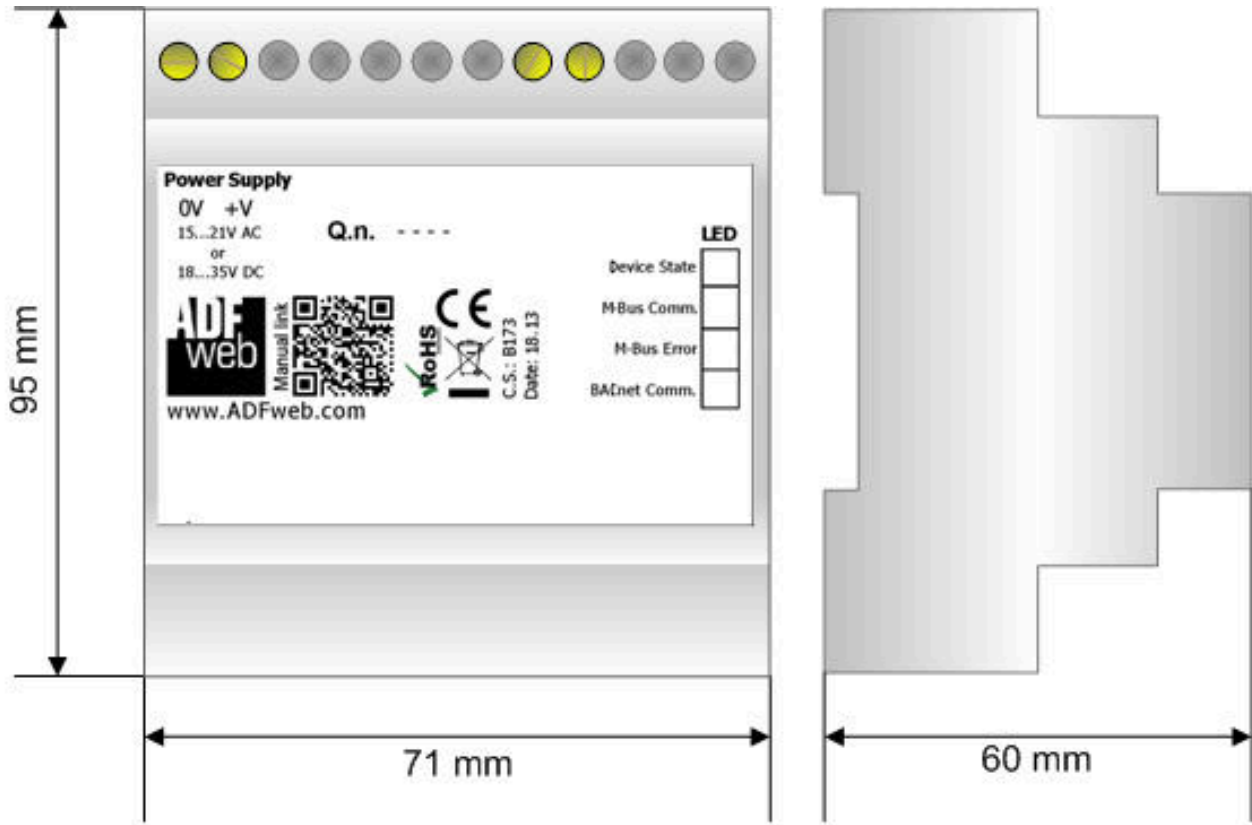

Gehäuse: PVC
Gewicht: 200g (ca.)



Wachendorff Prozesstechnik GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 (0) 67 22 / 99 65 - 20
E-Mail: wp@wachendorff.de
www.wachendorff-prozesstechnik.de

